

PORTACOUNT® PRO+ RESPIRATOR FIT TESTER MODEL 8038

RESPIRATOR FIT TESTING
YOU CAN TRUST



No other fit tester can quantitatively fit test all types of respirators—gas masks, SCBAs, respirators, even N95, P1 and P2 disposable (filtering-facepiece) respirators. The PortaCount® Pro+ Model 8038 Respirator Fit Tester eliminates the guesswork associated with tedious and error-prone qualitative fit test methods. If the mask requires fit testing, count on the PortaCount Pro+ fit tester to provide the fastest, easiest and best HSE and OSHA-accepted fit test method.

PortaCount Pro+ Respirator Fit Tester Kit Includes

- + Carrying case
- + AC adapter
- + Alcohol supply (enough for ~240 hours of operation)
- + FitPro™ Fit Test Software on CD
- + USB computer interface cable
- + Particle Generator (shipped separately)
- + Operation and service manual


For additional software information, see the TSI FitPro+ Fit Test Software Specification Sheet.

Features and Benefits

- + Greater simplicity with the built-in N95-Companion™ technology
- + Stand-alone operation—no external computer required
- + Reduces need for an external particle generator
 - Redesigned DMA for enhanced performance
 - Ability to perform N95, P2 and P1 fit testing with much lower ambient particle concentrations
- + Color touch screen
- + HSE and OSHA-compliant for all respirators, including N95, P1 and P2
- + Measures fit factors greater than 10,000
- + Switch between different respirator types in under a minute
- + Automates fit testing with FitPro+ Fit Test software
- + Software prints fit test cards with fit test report or on ID cards



UNDERSTANDING, ACCELERATED

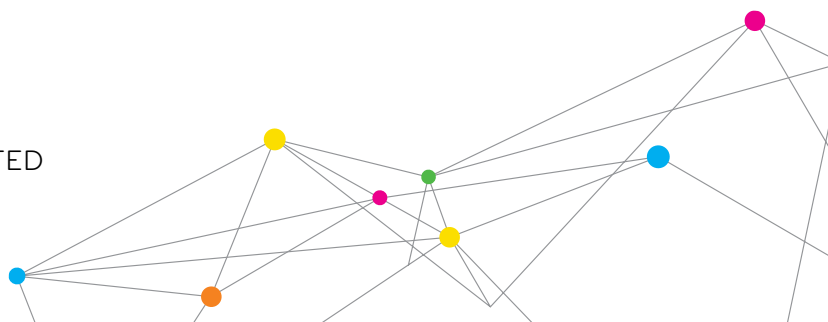

SPECIFICATIONS

PORTACOUNT® PRO+ RESPIRATOR FIT TESTER MODEL 8038

Fit Factor Range

1 to greater than 10,000, 1 to 200 for N95 masks

Typical Fit Factor Accuracy

±10% of reading

Respirator Facepieces that can be Fit Tested

Full-face elastomeric

Half-face elastomeric

NIOSH series-100 filtering-facepiece

NIOSH series-99 filtering-facepiece

NIOSH series-95 filtering-facepiece

P3 filtering-facepiece

P2 filtering-facepiece

P1 filtering-facepiece

Fit Factor Measurement

Direct measurement of fit factor (C_{out}/C_{in})*

Dimensions

6.75 in. x 8.5 in. x 9.5 in. (17 cm x 22 cm x 24 cm)

Weight

Unit Only 6.8 lb (3.1 kg)

With Standard

Accessories and Case 18 lb. (8.2 kg)

Power

Autosensing 100 to 250 VAC, 50 to 60 Hz

Flow Rate

Sample 350 cm³/min

Total 1000 cm³/min (nominal)

Temperature Range

Operation 32 to 100°F (0 to 38°C)

Storage -40 to 160°F (-40 to 70°C)

Alcohol

Hours Per Charge 6 hours at 70°F (21°C)

Alcohol Type 99.5%+ reagent grade isopropyl

Carrying Case

Dimensions (HWD) 9 in. x 13.7 in. x 19.5 in.
(23 cm x 34.8 cm x 49.5 cm)

Pass/Fail Setting

User-selectable: 0 to 10,000

Factory Recalibration Interval

One year

Warranty

Two years on workmanship and materials

Minimum PC Hardware Requirements for FitPro+ Fit Test Software

Windows® 7 (32 and 64 bit), Windows 8 (32 and 64 bit), or Windows 10 (32 and 64 bit) operating system

Microsoft.Net version 4 (installation software will install Microsoft.Net if necessary) **Note** – An internet connection is required to install Microsoft.Net

≥ 1 GHz process

≥ 12080 x 800 screen resolution monitor

500 MB free space on hard drive

1 free USB port

CD-ROM reader or internet connection (to install the software)

Optional Accessories

Mask Sampling Adapters for select respirator models

*Mask leakage is measured simultaneously while test subject moves and breathes.

Model 8038 PortaCount® Pro+ Respirator Fit Tester is patented under U.S. Patent No. 6,125,845.

PortaCount, TSI, and the TSI logo are registered trademarks, and FitPro+, and N95-Companion are trademarks of TSI Incorporated.

Windows is a registered trademark of Microsoft Corporation in the United States and/or other countries.



UNDERSTANDING, ACCELERATED

TSI Incorporated - Visit our website www.tsi.com for more information.

USA	Tel: +1 800 874 2811	India	Tel: +91 80 67877200
UK	Tel: +44 149 4 459200	China	Tel: +86 10 8219 7688
France	Tel: +33 1 41 19 21 99	Singapore	Tel: +65 6595 6388
Germany	Tel: +49 241 523030		