



Distributed by: Air-Met Scientific Ptv Ltd

Air-Met Sales/Service P: 1800 000 744 F: 1800 000 774

Air-Met Rental P: 1300 137 067 E: hire@airmet.com.au

Specifications Sheet

T-DOCK

AUTOMATED GAS DETECTOR MANAGEMENT SYSTEM

- Maintain up to eight instruments simultaneously
- Bump test T40 II Rattler™ monitors in just 15 seconds
- No training needed simple interface is intuitive, one button starts all bump tests
- Automate device management with programmable settings
- Enhance productivity and safety with ultra-fast gas monitor maintenance
- Easily download event logs

The T-DOCK™ is an intelligent, automated instrument management station for T40 II Rattler™ Single-Gas Monitors. It enables ultra-fast bump testing for 8 instruments simultaneously, saving space, time, span gas, and enhancing productivity for safety teams.

The T-DOCKTM is easy to install and its capacitive touchscreen guides the user through an easy-to-follow process. Download data from T40 II Rattlers via a USB memory stick or directly connect to a USB printer to print reports and certificates.

The T-DOCK $^{\text{TM}}$ is ideal for turnarounds, shutdowns, and mobile applications where power outlets are unavailable thanks to a USB-C power bank.

INSTRUMENT CONFIGURATIONS


DESCRIPTION

Docking station, T-DOCK™

PART NUMBER

1810-9705

| OPTIONAL ACCESSORIES | | CESSORIES |
|----------------------|-------------|-----------------------------|
| | PART NUMBER | DESCRIPTION |
| | 1810-9707 | Kit, Wall mount, T-DOCK™ |
| | 1810-9706 | Holder, Power bank, T-DOCK™ |

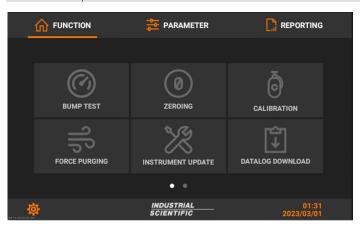

INDUSTRIAL SCIENTIFIC

AMERICAS

Phone: +1-412-788-4353 1-800-DETECTS (338-3287) | info@indsci.com

SPECIFICATIONS

INSTRUMENT WARRANTY

3-Year Warranty

DISPLAY

5" Color LCD Touchscreen

PHYSICAL BUTTON

1 'Quick Bump' button, 1 'Fn' button, 1 reset button

POWER SUPPLY

Input: USB-C, DC20V/3.25A

- 3 independent gas inlets (including 1 dedicated for quick bump test)
- 1 zero air inlet
- 1 exhaust outlet

DIMENSIONS

368 x 310 x 110 mm

WEIGHT

2.71kg

AUTOMATIC TESTS

Automatic bump test, calibration, zeroing, and purging

2 pumps

Flow rate: 2000ml/min, 500 ml/min per cradle (Max)

DATA OUTPUT

USB memory stick,

Printer PCL5 or above

SOFTWARE MANAGEMENT

T40 II Rattler™ Instrument Firmware Upgrade T-DOCK™ Operating System (Android 7.1)

COMPATIBLE INSTRUMENTS

T40 II Rattler™

Compatible with USB TYPE-C PD Power Bank Min Power 65 W

DATASTORAGE

16 GB Memory

EMC Directive 2014/30/EU, EN IEC 61326-1:2021

FCC Part 15



ASIA PACIFIC

Phone: +65-6561-7377 Fax: +65-6561-7787 | info@ap.indsci.com

EMEA

Phone: +33 (0)1 57 32 92 61 Fax: +33 (0)1 57 32 92 67 | info@eu.indsci.com