


# BaroSCOUT

## BAROMETRIC/TEMPERATURE SMART SENSOR

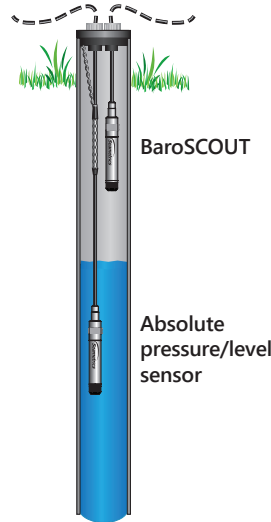

### APPLICATIONS

Barometrically compensate absolute pressure sensors for level measurement—no desiccant tubes, bellows, or vent tubes needed!

Supplement aquifer test data in leaky or confined conditions

### Features

- Measures/Records barometric pressure and temperature
- Low power — 3 year battery life
- Replaceable battery
- Modbus® RTU (RS485)
- $\pm 0.05\%$  FS accuracy
- Small diameter — 0.875" (2.22 cm)
- 50,000 record non-volatile memory
- Barometric compensation utility
- Free new Aqua4Plus 2.0 software

The **Seametrics BaroSCOUT** Smart Sensor is designed to measure barometric pressure, along with temperature. It is an ideal companion to our absolute pressure/level sensors and can be used to adjust their readings for atmospheric pressure.

This industry standard digital RS485 interface device records up to 50,000 records of pressure, temperature, and time data, operates with low power, and features easy-to-use Aqua4Plus 2.0 software with powerful features. Constructed with 316 stainless steel, acetal, and Viton®, this sensor provides high-accuracy readings in rugged and corrosive field conditions.

The BaroSCOUT utilizes an extremely rugged and stable piezo-electric media-isolated pressure element combined with a 16-bit analog-to-digital converter. This provides extremely accurate and stable pressure input into the microprocessor on the circuit board that measures the pressure and stores the data in non-volatile memory.

A replaceable 1/2 AA 3.6v lithium battery powers the BaroSCOUT. The unit is programmed using our easy-to-use control software. Once programmed the unit will measure and collect data at the time interval programmed.

While most will use the BaroSCOUT with Seametrics' Aqua4Plus 2.0 software, it is by no means limited to that software. You can use your own Modbus® RTU software or logging equipment to read measurements via RS485, tying into your existing telemetry and control systems.

Note: The BaroSCOUT is intended for use in atmosphere—not to be submerged.

### Contact Your Supplier




Distributed by:  
Air-Met Scientific Pty Ltd  
Air-Met Sales/Service  
P: 1800 000 744  
F: 1800 000 774  
E: sales@airmet.com.au

Air-Met Rental  
P: 1300 137 067  
E: hire@airmet.com.au  
W: www.airmet.com.au



# BaroSCOUT

## BAROMETRIC/TEMPERATURE SMART SENSOR

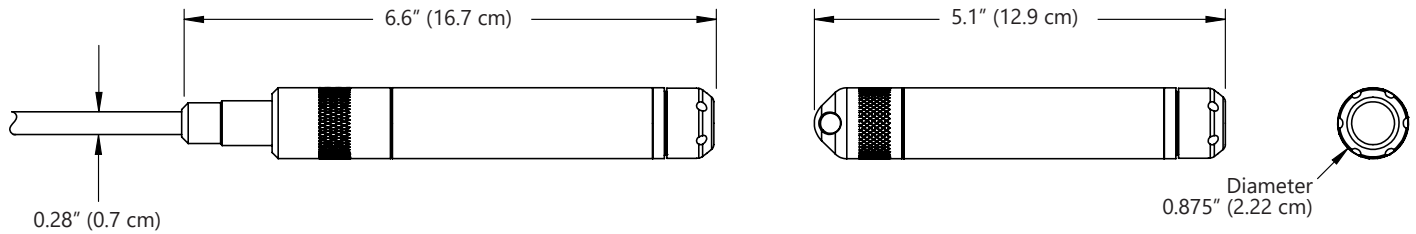

### GENERAL

<b>Length (cabled version)</b>	6.6" (16.7 cm)
<b>Length (cableless version)</b>	5.1" (12.9 cm)
<b>Diameter</b>	0.875" (2.22 cm)
<b>Body Material</b>	316 stainless steel
<b>Wetted Materials</b>	316 stainless steel, acetal, fluoropolymer
<b>Communication</b>	RS485 Modbus® RTU
<b>Direct Modbus Read Output</b>	32-bit IEEE floating point
<b>Internal Math</b>	32-bit floating point
<b>Operating Temp. Range</b>	-20° C to 60° C
<b>Storage Temp. Range</b>	-40° C to 80° C
<b>Regulatory</b>	CE

### LOGGING

<b>Memory</b>	50,000 records
<b>Logging Rate</b>	1x per second
<b>Software</b>	Complimentary Aqua4Plus 2.0
<b>File Formats</b>	.csv / .a4d

### POWER

<b>Internal Battery</b>	One replaceable 1/2 AA 3.6V lithium battery
<b>Expected Battery Life</b>	3 years (depending on use)

### TEMPERATURE

<b>Element Type</b>	Thermistor
<b>Accuracy</b>	± 0.1° C (from -20° C to 60° C)
<b>Resolution</b>	0.01° C
<b>Units</b>	Celsius, Fahrenheit, Kelvin

### PRESSURE

<b>Transducer Type</b>	Silicon strain gauge
<b>Transducer Material</b>	316 stainless steel
<b>Units</b>	PSI, FtH <sub>2</sub> O, inH <sub>2</sub> O, cmH <sub>2</sub> O, mmH <sub>2</sub> O, mH <sub>2</sub> O, inHg, cmHg, mmHg, Bars, mBars, kPa
<b>Accuracy</b>	± 0.008 PSI ( 0.55 mbar) (@ 20° C) ± 0.02 PSI (1.34 mbar) (@ -20° C to 60° C)
<b>Resolution</b>	0.01% FS (typical)

NOTE: Intended for use in atmosphere—not to be submerged.

**User is responsible for reviewing end use application with their supplier for product suitability.**