

AP2B

AutoPump®

Bottom Inlet, Short

Max. Flow 2.0 gpm (7.6 lpm)

O.D. 1.75 in (4.45 cm)

Length 33 in. (85 cm)

Description

The AP2 Bottom Inlet Short AutoPump provides maximum capabilities and flow in a bottom inlet pump for 2" (50 mm) diameter wells. It is offered in optional versions to handle even severe remediation and landfill pumping applications, and delivers flow rates up to 2.0 gpm (7.6 lpm). The AP2 Short Bottom Inlet AutoPump is complemented by the most comprehensive selection of accessories to provide a complete system to meet site specific requirements. Call QED for prompt, no-obligation assistance on your pumping project needs.

The AutoPump Heritage

The AP2 Bottom Inlet Short AutoPump is part of the famous AutoPump family of original automatic air-powered pumps, developed in the mid 1980s specifically to handle unique pumping needs at remediation and landfill sites. Over the years they've proven their durability at thousands of sites worldwide. AutoPumps are designed to handle difficult pumping challenges that other pumps can't, such as solvents, suspended solids, corrosives, temperature extremes, viscous fluids and frequent start/stop cycles. Beyond just the pump, AutoPump systems offer the most complete range of tubing, hose, connectors, caps and accessories to help your installation go smoothly. This superior pumping heritage, application experience and support back up every AutoPump you put to work on your project.



Advantages

1. The original 2" automatic air-powered well pump, proven worldwide over 15 years
2. The industry leader in reliability, durability, flow rate and depth capability in an automatic pump for 2-inch wells
3. Handles solids, hydrocarbons, solvents, corrosive conditions, viscous fluids and land fill liquids
4. One-year warranty




Available for Rental at:
Air-Met Scientific Pty Ltd

Air-Met Sales/Service P: 1800 000 744 F: 1800 000 774 E: sales@airmet.com.au
Air-Met Rental P: 1300 137 067 E: hire@airmet.com.au W: www.airmet.com.au



Pump Dimensions

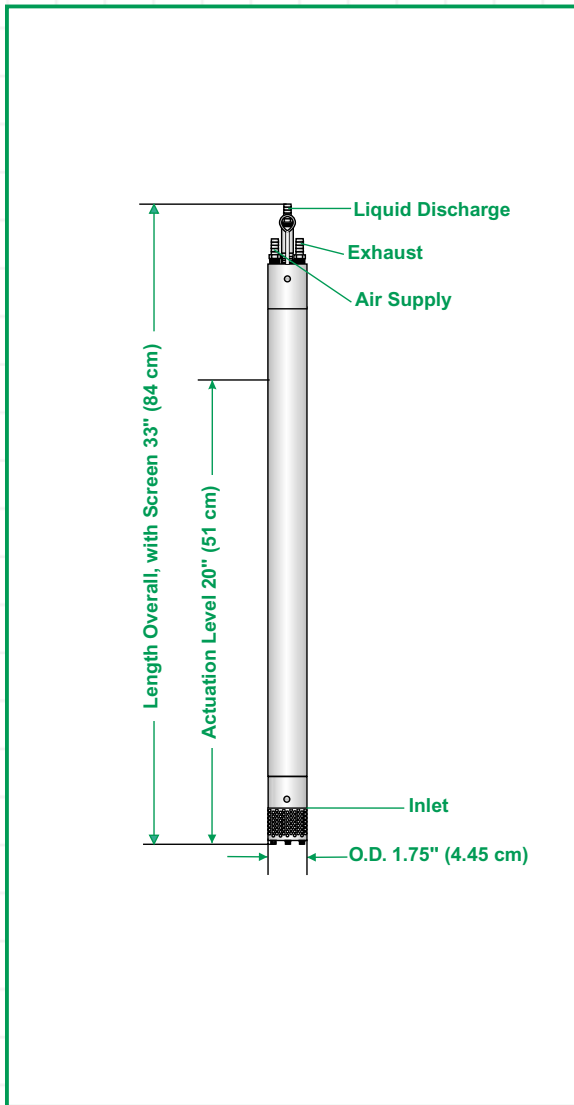

Specifications & Operating Requirements

Model	2" - Short AP2 Bottom Inlet
Liquid Inlet Location	Bottom
OD	1.75 in. (4.45 cm)
Length Overall (pump & fittings)	33 in (85 cm)
Length Overall, w / Extended Screen	35. in (89cm)
Weight	5.4 lb (3.6 Kg)
Max. Flow Rate	2.0 gpm (7.6 lpm)
Pump Volume / Cycle	0.05 - 0.08 gal (0.19 - 0.30 L)
Max. Depth	300 ft (91.4 m)
Air Pressure Range	5 - 130 psi (0.4 - 9.2 kg/cm ²)
Min. Actuation Level	20 in. (51 cm)
Air Usage	.39-2.58 scf/gal (2.9-19.3 liters fo air/fluid liter)
	See air usage chart
Min. Liquid Density	0.7 SpG (0.7 g/cm ³)
Standard Construction Materials¹	
Pump Body	Stainless Steel
Pump Ends	Stainless Steel
Internal Components	Stainless Steel, Viton, PVDF ³
Tube & Hose Fittings	Brass or Stainless Steel
Fitting Type	Barbs or Quick Connects
Tube & Hose Options	
Tubing Material	Nylon
Sizes² - Liquid Discharge	5/8 in. (16 mm) OD
Pump Air Supply	3/8 in. (9.5 mm) OD
Air Exhaust	1/2 in. (13 mm) OD
Hose Material	Nitrile
Sizes - Liquid Discharge	1/2 in. (13 mm) ID
Pump Air Supply	1/4 in (6.4 mm) ID
Air Exhaust	3/8 in. (9.5 mm) ID

¹ Material upgrades available

² Applies to QED supplied tubing; other tubing sources may not conform to QED fittings.

³ PVDF - Polyvinylidene Fluoride

Application Limits (base model)

Base model AP2 AutoPumps are designed to handle the application ranges described below. For applications outside this range, consult QED about AP2 upgrades.

Maximum Temperature: 150°F (65°C)




pH Range: 4-9

Solvents and Fuels: diesel, gasoline, JP1-JP6, #2 heating oils, BTEX, MTBE, landfill liquids

AP-2 AutoPumps are warranted for one (1) year: 100% materials and workmanship.

Flow Rates¹

**1/2 inch (13 mm)
Inside Diameter Discharge Hose**
(Equivalent to 5/8-Inch O.D. Tubing)

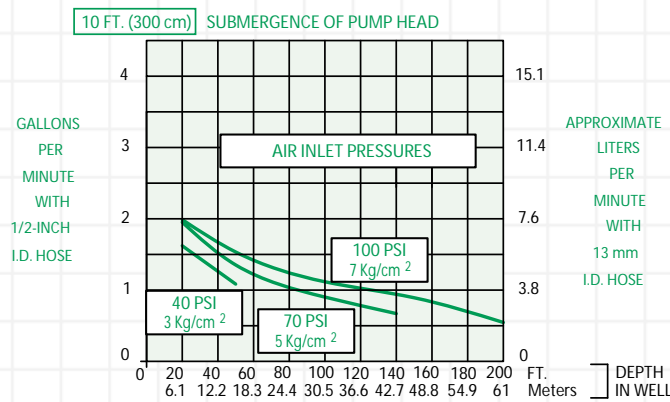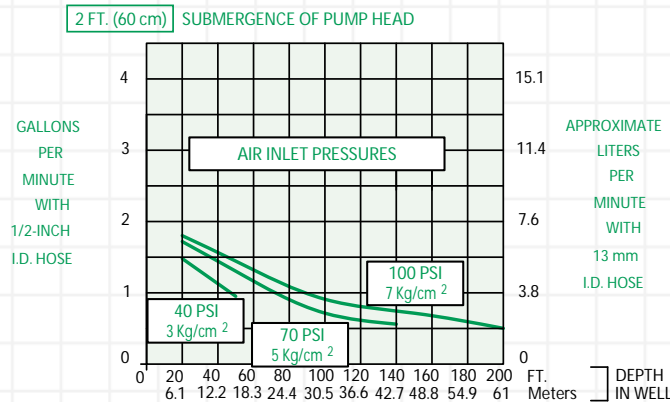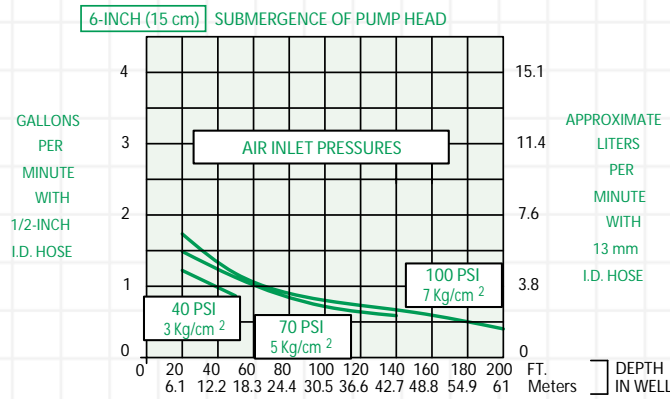


¹ FLOW RATES MAY VARY WITH SITE CONDITIONS. CALL QED FOR TECHNICAL ASSISTANCE.

Air Consumption



STANDARD
CUBIC FEET OF AIR
PER
GALLON PUMPED
(SCF/GAL)

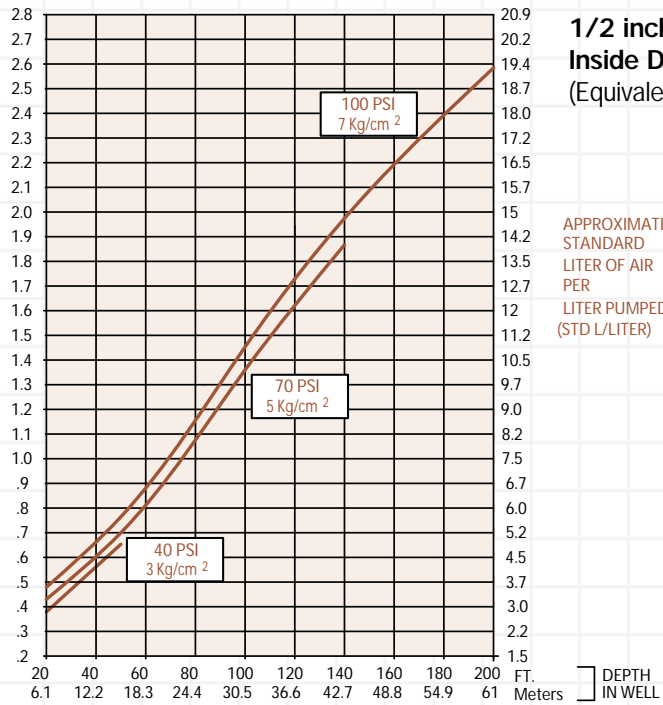

**1/2 inch (13 mm)
Inside Diameter Discharge Hose**
(Equivalent to 5/8-inch O.D. Tubing)

APPROXIMATE
STANDARD
LITER OF AIR
PER
LITER PUMPED
(STD L/LITER)

DEPTH
IN WELL